


FOREST CCS Track

CCS Cord Control System Track



FOREST CCS®

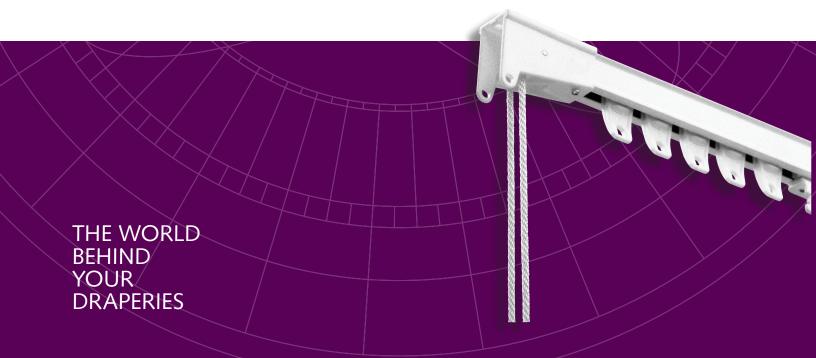



Scan for more information on the FOREST CCS Contract Cord System



CCS® CONTRACT CORD SYSTEM

- Aluminum extrusion, powder coated and lubricated with a patented process.
- Maximum weight is 50 lbs per system.
- Bendable CCS Track can be bent and curved. An exact size template is required.
- Cord draw, one or two way. Bead chain also available.
- Stackback: Ripplefold 6" per width, pinchpleat 7" per width, accordiafold 5" per width.
- All Forest corded products include a child safety tension device and warning label.

ASSEMBLED SYSTEM

Includes track, masters, pinchpleat or ripplefold carriers, brackets, cord, tension pulley, child safety device.

SOO		COMPONENT
•	3/4"	CCS Contract Cord Track 20 tracks/bundle 51116-25 white 16' 51116-65 brown 16' 51116-90 grey 16'
•		3906-25 59 black , 65 brown, 90 grey Track Connector
•		52801-25 65 brown, 90 grey End Pulley, 2 1/4" Reversible Use on right or left

SOO	COMPONENT
•	52801-25A Right 52801-25B Left End Pulley w/ Snap 2 1/4 Reversible, for Ripplefold
•	52803-25 65 brown, 90 grey Small End Pulley 1 1/2" Reversible, use with Butt Masters and one-way draw
•	3001-25 59 black , 65 brown, 90 grey Regular Duty Ceiling Bracket

FOREST CCS®

SSS	COMPONENT	SSS	COMPONENT
	3003-25 59 black, 65 brown, 90 grey Heavy Duty Ceiling Bracket w/ Smart Klick		52008-25 59 black, 65 brown Slim Line Klick Carrier draperies hang to conceal track
	30031-25 59 black, 65 brown, 90 grey Ceiling Bracket Cover use with 3003-XX		52004-25 Low Profile Ball Bearing
1 1/2 "	53202-25 59 black, 65 brown, 90 grey 3" Smart Klick Wall Bracket w/ wide base, adjusts 3-4.5"		52508-25 Overlap R 52509-25 Underlap L 59 black, 65 brown
7 2"	53206-25 59 black, 65 brown, 90 grey 6" Smart Klick Double Wall Bracket w/ wide base adjusts 2.5"-4" & 6"-7.5"	H11/2"4	Swivel Foot Multi-Functional Master for bends and curves 52508-25A Overlap R 52509-25A Underlap L 59 black, 65 brown
7 2 1/2 1/2	3280-25 59 black, 65 brown, 90 grey 3" Wall Bracket, heavy duty projection 2 1/2"	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Swivel Foot Multi-Functional Master w/ snaps 52410-25 Butt R
7 2 ½ 1/2 1/2	3281-25 59 black, 65 brown, 90 grey 6" Double Wall Bracket, heavy duty		52409-25 Butt L 59 black Standard Butt Master w/ snaps for baton use
	32801-25 59 black, 90 grey Wall Bracket Cover use with 3280 & 3281		52510-25 59 black, 65 brown, 90 grey Cord Connector
•	Two Piece Connected Snap Carrier w/ Square Base, in plastic sleeve. Use 1 1/4" snap tape 2114-25, 59 black 60% fullness, 2 5/8" OC		9004-25 3.2mm Cord 333.34 yds./roll
	2111-25, 59 black, 65 brown, 90 grey 80% fullness, 2 3/8" OC 2112-25, 59 black 100% fullness, 2 1/8" OC 2115-25, 59 black 120% fullness, 1 7/8" OC	CHILDSAF	49501-00 Tension Device For child safety

• Standard item in assembled sets.

FOREST CCS® SPECIFIATIONS



PRODUCT INFORMATION

- Heavy duty cord operated system, with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Quick installation with "Smart Klick". brackets for wall and ceiling applications.
- Bendable; it can be curved and reversed curved with a 8" radius or continuous curve.
- Heavy duty klickable carriers 10 carriers on a breakaway strip UV protected.
- Can also be used for Forest Easyfold and accordiafold drapery systems.
- Maximum fabric weight is 50 lbs. per system.
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Warranty: 10 years.




Easy installation click - position - tighten



Clickable carrier

PROFILE

- Shown actual size 1:1
- Aluminum Extrusion
- Weight: 3.22 ounce per ft
- Dimensions: 3/4" x 3/4"

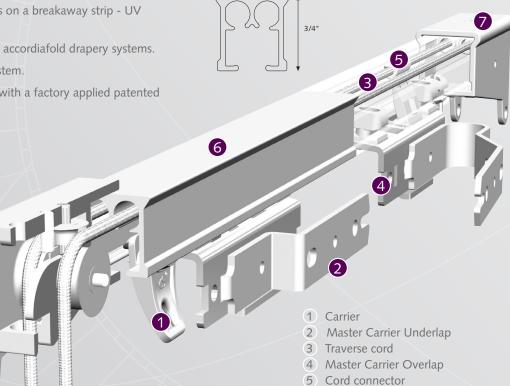


CCS Track

7 End Pulley



APPLICATIONS



BENDING / CURVING


The track can be curved and reversed curved using an 8" radius. Continuous curving can be done with the electric powered bender.



FOR USE IN

Hotels - motels - offices - healthcare - schools - residential or any location where a cord operated system is required.

Smart Klick Ceiling Bracket with cover




Smart Klick Single Wall Bracket

A) 3"

B) 2 1/2"

A) 4"

B) 3 1/2"



Smart Klick Wall Double Wall Bracket

A) 6"


B) 3 1/2"

C) 1 3/4"


A) 8"

B) 3 1/2"

C) 3 3/4"



Smart Klick Triple Wall Bracket



Brackets need to placed every 36", depending on fabric weight.