



MOTORIZED SYSTEMS

Our wide range of control options make finding a fit for your room easy; controlling the drapery by hand, remote, or through the building automation system. When controlling motorized drapery with your smart phone or tablet, you can create and schedule customized room scenes that allow your drapes to operate on their own throughout the day.

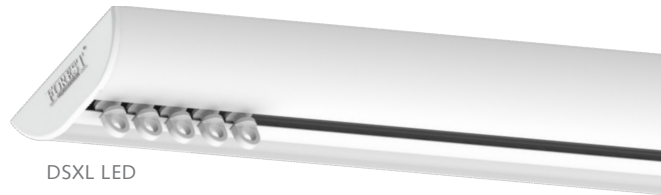
THE
WORLD
BEHIND
YOUR
DRAPERIES



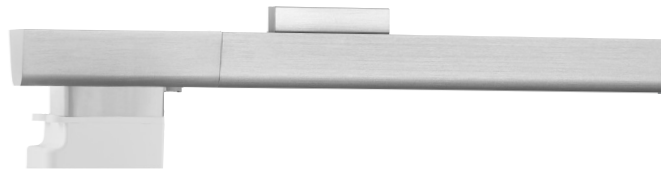
FMS®



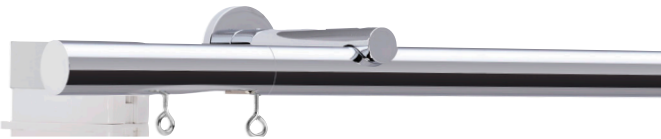
RMS



DSXL LED



HANOVER



DRESDEN



DEVENTER MRS®



CORDOBA



LONDON

DRAPERY MOTORIZATION

SHUTTLE MOTORS | CONTROLS ROADMAP | FMS | RMS | DSXL LED | HANOVER | DRESDEN | DEVENTER MRS | CORDOBA | LONDON



DARPERY MOTORIZATION SHUTTLE MOTOR SPECIFICATIONS

SHUTTLE® HD (M)

SHUTTLE® ECO (S)



SPECIFICATIONS

VOLTAGE SHUTTLE
RECEIVER
POWER SUPPLY
MAX POWER
TORQUE
TRAVEL SPEED
NOISE LEVEL
MAXIMUM WEIGHT
DIMENSIONS
CERTIFICATIONS/MARKINGS
COLOR OPTIONS

24V DC
Internal, optional
External, 100-240V AC - 1.5A,
50-60Hz; Output 24V DC - 2.7A
65W
1.5 Nm
5.5" per second standard
7" per second maximum
< 40 dB(A)
160 lbs per motor
120 lbs per motor - curved track
2.76" x 1.97" x 9.5"
CE/FCC/DOE
White / Black

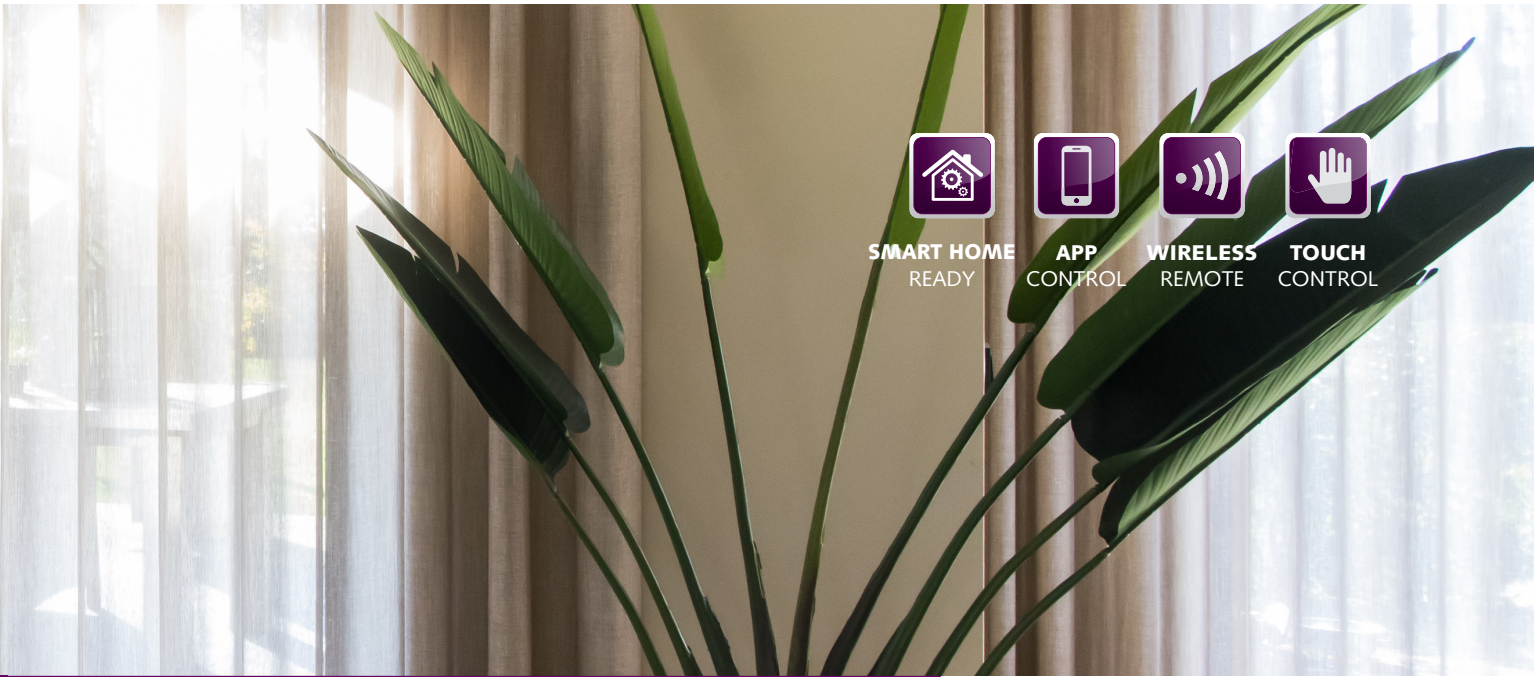
24V DC
Internal
External, 100-240V AC - 0.8A,
50-60Hz; Output 24V DC - 2.5A
40W
1.0 Nm
5.5" per second standard
7" per second maximum
< 40 dB(A)
100 lbs per motor
90 lbs per motor - curved track
2.76" x 1.97" x 7.5"
CE/FCC/DOE
White

FEATURES

TOUCH CONTROL TECHNOLOGY
INTEGRATED EMERGENCY CONTROL
RF COMMUNICATION STANDARD
Z-WAVE COMMUNICATION
AUTOMATION SYSTEM COMPATIBLE
WI-FI COMPATIBLE
WORKS WITH DS-XL LED DIMMER
WORKS WITH WIRELESS CONNECTOR
CAN BE USED WITH CURVED TRACK
PLUG & PLAY
WARRANTY

✓
✓
✓
-
✓ using RS485 & dry contacts
✓
✓
✓
✓
✓
✓
10 Years

✓
✓
✓
-
✓ using RS485 & dry contacts
✓
✓
✓
✓
✓
✓
10 Years



SMART HOME READY
APP CONTROL
WIRELESS REMOTE
TOUCH CONTROL

SHUTTLE® iOn



Our wide variety of control options make finding a fit for your windows easy – controlling the drapes by hand, wall switch, remote or even by home automation system.

SPECIFICATIONS

VOLTAGE SHUTTLE RECEIVER	14.8V DC
BATTERY	Internal
MAX POWER	Lithium iOn battery + charger (3-4 months between charges)
TORQUE	30W
TRAVEL SPEED	1.0 Nm
NOISE LEVEL	5.5" per second standard
MAXIMUM WEIGHT	< 40 dB(A)
DIMENSIONS	55 lbs per motor 40 lbs per motor - curved track
CERTIFICATIONS/MARKINGS	2" x 3" x 12.25"
COLOR OPTIONS	CE/FCC/DOE
	White

FEATURES

TOUCH CONTROL TECHNOLOGY	✓
INTEGRATED EMERGENCY CONTROL	✓
RF COMMUNICATION STANDARD	✓
Z-WAVE COMMUNICATION	-
AUTOMATION SYSTEM COMPATIBLE	✓ using RS485 & dry contacts
WI-FI COMPATIBLE	✓
WORKS WITH DS-XL LED DIMMER	✓
WORKS WITH WIRELESS CONNECTOR	✓
CAN BE USED WITH CURVED TRACK	✓
PLUG & PLAY	✓
WARRANTY	10 Years on motor 2 years on battery pack



TOUCH CONTROL

Open or close your drapes with a gentle tug.



FOREST WALL SWITCH

2-channel wall switch, wireless. Can be used with all Forest Shuttle motors.



FOREST DIAMOND SENSE REMOTE

15-channel remote controls up to 15 motors individually and together, with a timer or manually. Range up to 98 feet. Wall mounted holder included.



BOND BRIDGE PRO

With the Bond Bridge Pro, easily pair your Forest remote and get app control for Forest motorized window coverings and other devices all in one place.



SIDEKICK GEN 3 REMOTE

5- or 1-channel remote control. Pairs directly with drapery motor. Use with Bond Bridge Pro or without. Estimated 10-year battery life.

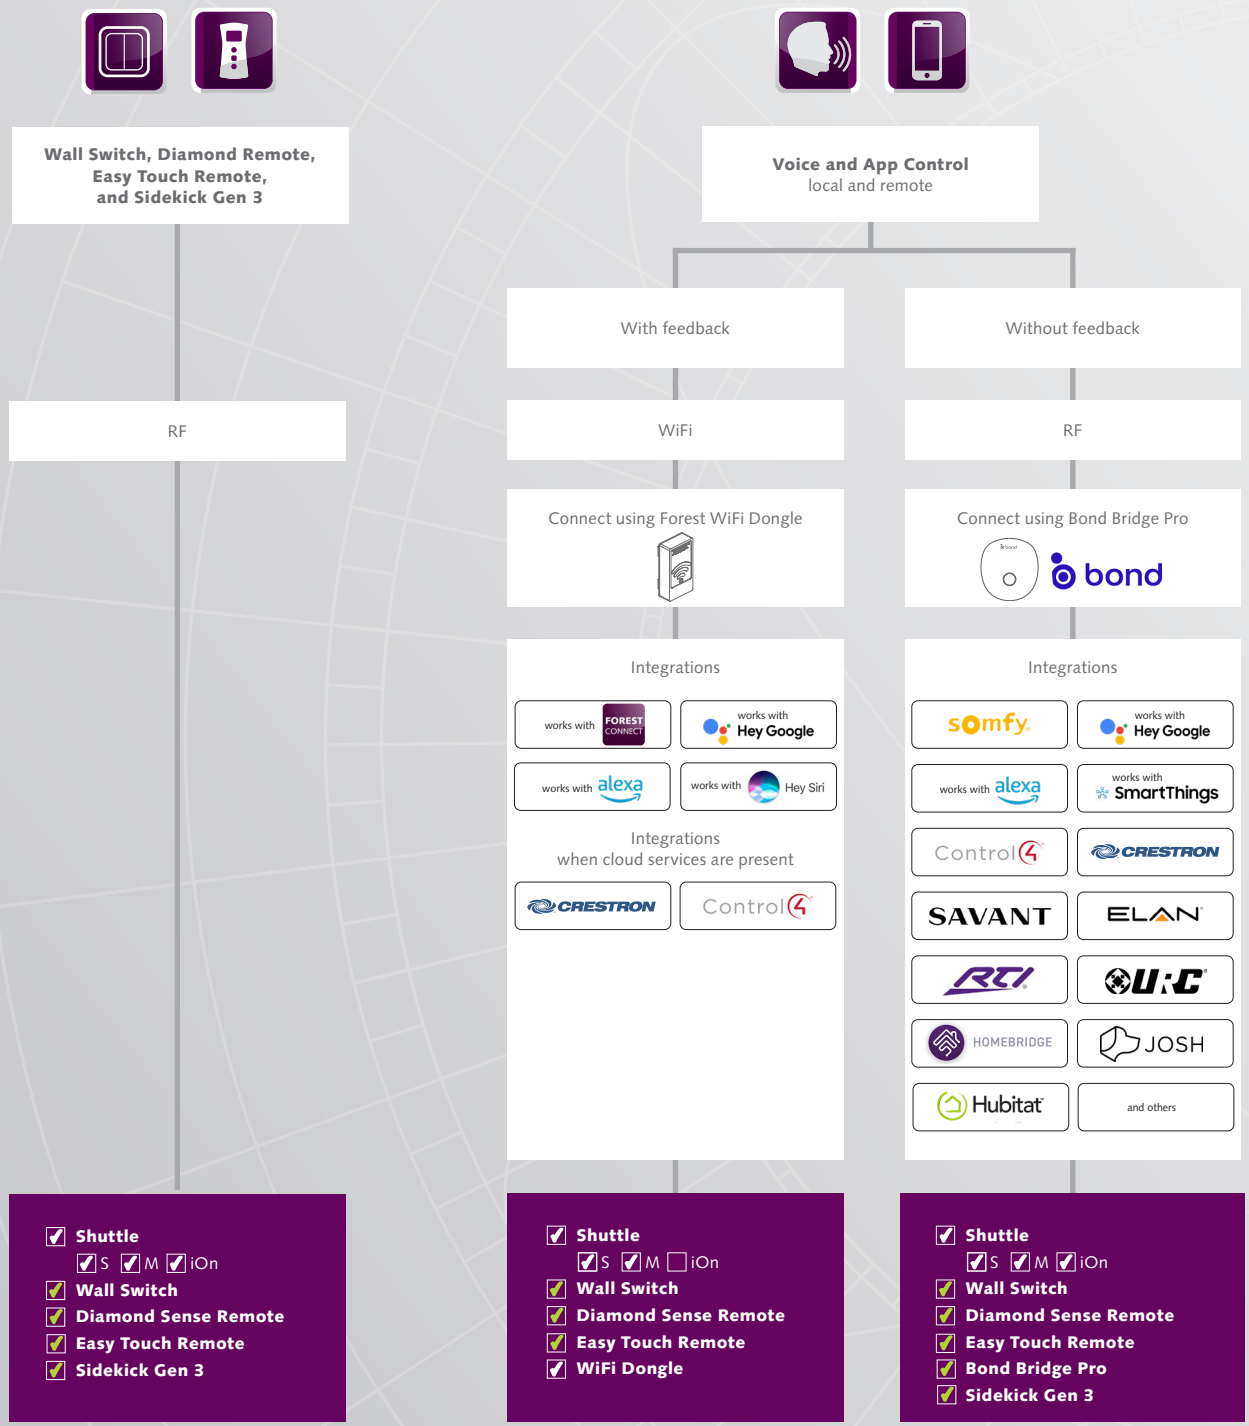
FOR ADDITIONAL CONTROL OPTIONS, SEE THE ROADMAP ON THE FOLLOWING PAGES.

DRAPERY MOTORIZATION

SHUTTLE MOTORS | **CONTROLS ROADMAP** | FMS | RMS | DSXL LED | HANOVER | DRESDEN | DEVENTER MRS | CORDOBA | LONDON

DRAPERY MOTORIZATION CONTROLS ROADMAP

HOW DO YOU WANT TO CONTROL YOUR DRAPERY?





Wired Building Automation System

we advise you work with an installation specialist

With feedback

Without feedback

RS485

Dry Contact

Integrations

Control4

and others

Integrations

Control4

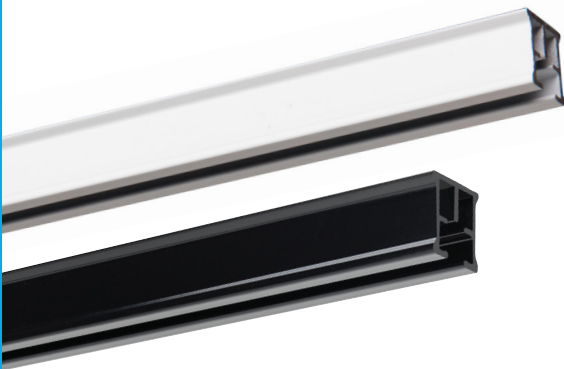
and others

- Shuttle
- S M iOn
- Wall Switch
- Diamond Sense Remote
- Easy Touch Remote
- RS485 Port

- Shuttle
- S M iOn
- Wall Switch
- Diamond Sense Remote
- Easy Touch Remote
- RS485 Port



Scan for more information on the FMS Motorized Track System














FMS® FOREST MOTORIZED SYSTEM

- The original Forest motorized track, aluminum extrusion, white, powder coated and lubricated with a patented process. Ultra-quiet and smooth operation for contract or residential applications.
- Track can be bent or curved. An actual size template is required. See pages 17-18 for more information.
- Maximum weight is 6 lbs/ft.
- Motorize with any Forest Shuttle. See all motor specifications on pages 93-94. All Forest Shuttle motors include a 10 year warranty.
- Control drapes with a gentle tug, wall switch remote, any home automation system or by smart phone app. See control options pages 95-96.

ASSEMBLED SYSTEM



















Includes track, masters, pinchpleat or ripplefold carriers, brackets, motor, and power supply plus choice of EasyTouch remote, Diamond remote or Forest wall switch.

FMS	COMPONENT
• 	52925-25 Shuttle HD (M) 52925-59 Shuttle HD (M) black 52939-25 Shuttle Eco (S) See motor specs on pages 93-94
• 	52928-25 Power Cord, 7' 6" 52934-25 Power Cord, 16' includes 24 volt power supply
• 	52926-25 Shuttle iOn Includes battery pack. Order charging cable below separately, 52924-59. See motor specs on pages 93-94
• 	52924-59 Battery Charger Charges battery included with Shuttle iOn motor above, 52926-25.
• 	52949-25 Battery Pack Additional battery pack for Shuttle iOn motor
• 	52933-25 white 59 black Forest Wall Switch 2 channel

FMS	COMPONENT
• 	52931-25D white 59D black Diamond Sense Remote RF 15 channel w/ holder, range 98'
• 	<i>COMING SOON!</i> 52960-25 white 59 black EasyTouch Remote RF 6 channel
• 	52948-25 59 black Wi-Fi Dongle For voice and app control over wi-fi. Provides feedback (bi-directional). Use with Shuttles HD and Eco.
• 	52955-25 Bond Bridge Pro For voice and app control over RF. Easily pair using the Forest remote. Controls all of your devices in one hub.
• 	52945-25 white Sidekick Gen 3 Remote Works with or without Bond Bridge Pro. 1-5 channels

DRAPERY MOTORIZATION

SHUTTLE MOTORS | CONTROLS ROADMAP | **FMS** | RMS | DSXL LED | HANOVER | DRESDEN | DEVENTER MRS | CORDOBA | LONDON

FMS	COMPONENT	FMS	COMPONENT
•	 <p>51319-25 white 59 black FMS Track 19' x 10 tracks per bundle bundle = 190'</p>	•	 <p>52009-25 Ball Bearing Carrier for motorization</p>
•	 <p>3906-25 59 black Track Connector and Key 3904-00</p>	•	 <p>52508-25 Overlap Right 52509-25 Underlap Left 59 black Belt Master Carrier</p>
•	 <p>3003-25 59 black HD Klick Ceiling Bracket</p>	•	 <p>52508-25A Overlap Right 52509-25A Underlap Left 59A black Belt Master Carrier with snaps</p>
•	 <p>30031-25 59 black Ceiling Bracket Cover</p>	•	 <p>52410-25 Butt Right 52409-25 Butt Left 59 black Butt Master Carrier with snaps</p>
•	 <p>53202-25 59 black 3" Klick Single Wall Bracket with wide base adjusts 3" - 4 1/2"</p>	•	 <p>2552-25 6" Extension Arm for master Use w/ two one-way draw</p>
•	 <p>53206-25 59 black 6" Klick Double Wall Bracket with wide base adjusts 2 1/2" - 4" and 6" - 7 1/2"</p>	•	 <p>52903-25 59 black Forest Shuttle Motor Pulley Connects motor to track</p>
•	 <p>Two Piece Connected Snap Carrier w/ Square Base, in plastic sleeve. Use 1 1/4" snap tape 2114-25, 59 black 60% fullness, 2 5/8" OC 2111-25, 65 brown, 90 grey 80% fullness, 2 3/8" OC 2112-25, 59 black 100% fullness, 2 1/8" OC 2115-25, 59 black 120% fullness, 1 7/8" OC</p>	•	 <p>MTDR-EP-DR-AC Rollease Motor Pulley Connects motor to track</p>
•	 <p>52008-25 59 black Slim Line Klick Carrier Draperies hang to conceal track</p>	•	 <p>52910-25 59 black Return Pulley</p>
		•	 <p>9012-25 Transport Belt Kevlar reinforced</p>
		•	 <p>52512-25 white 59 black Transport Belt Connector</p>



Scan for more information on the FOREST RMS Recessed Motorized System














RMS RECESSED MOTORIZED SYSTEM

- Heavy duty aluminum extrusion, white, powder coated and lubricated with a patented process. Ultra-quiet and smooth operation for contract or residential applications.
- Maximum weight is 8 lbs/ft.
- Motorize with any Forest Shuttle. See all motor specifications on pages 91-92. All Forest Shuttle motors include a 10 year warranty.
- Control drapes with a gentle tug, wall switch remote, any home automation system or by smart phone app. See control options pages 95-96.

ASSEMBLED SYSTEM
















Includes track, masters, pinchpleat or ripplefold carriers, recess profile, fixing strip, wedge, motor, pulley, cover plate, and power supply plus choice of EasyTouch remote, Diamond remote or Forest wall switch.

RMS	COMPONENT
• 	<p>52925-25 Shuttle HD (M) 52925-59 Shuttle HD (M) black 52939-25 Shuttle Eco (S) See motor specs on pages 93-94</p>
• 	<p>52928-25 Power Cord, 7' 6" 52934-25 Power Cord, 16' includes 24 volt power supply</p>
• 	<p>52926-25 Shuttle iOn Includes battery pack. Order charging cable below separately, 52924-59. See motor specs on pages 93-94</p>
• 	<p>52924-59 Battery Charger Charges battery included with Shuttle iOn motor above, 52926-25.</p>
• 	<p>52949-25 Battery Pack Additional battery pack for Shuttle iOn motor</p>
• 	<p>52933-25 white 59 black Forest Wall Switch 2 channel</p>

RMS	COMPONENT
• 	<p>52931-25D white 59D black Diamond Sense Remote RF 15 channel w/ holder, range 98'</p>
• <i>COMING SOON!</i> 	<p>52960-25 white 59 black EasyTouch Remote RF 6 channel</p>
• 	<p>52948-25 59 black Wi-Fi Dongle For voice and app control over wi-fi. Provides feedback (bi-directional). Use with Shuttles HD and Eco.</p>
• 	<p>52955-25 Bond Bridge Pro For voice and app control over RF. Easily pair using the Forest remote. Controls all of your devices in one hub.</p>
• 	<p>52945-25 white Sidekick Gen 3 Remote Works with or without Bond Bridge Pro 1-5 channels</p>

DRAPERY MOTORIZATION

SHUTTLE MOTORS | CONTROLS ROADMAP | FMS | **RMS** | DSXL LED | HANOVER | DRESDEN | DEVENTER MRS | CORDOBA | LONDON

RMS	COMPONENT	RMS	COMPONENT
•	 <p>51623-25 RMS Track white 23' x 10 tracks/bundle bundle = 230'</p>	•	<p>Two Piece Connected Snap Carrier w/ Square Base, in plastic sleeve. Use 1 1/4" snap tape 2114-25, 59 black 60% fullness, 2 5/8" OC 2111-25, 65 brown, 90 grey 80% fullness, 2 3/8" OC 2112-25, 59 black 100% fullness, 2 1/8" OC 2115-25, 59 black 120% fullness, 1 7/8" OC</p> 
•	 <p>51723-25 Recess Profile, 23' Order same length as track</p>	•	<p>9112-25 Transport Belt</p> 
•	 <p>51724-25 Recess Profile Fixing Strip, 23' Order 6" shorter than track</p>	•	<p>52512-25 white 59 black Transport Belt Connector</p> 
•	 <p>53914-25 Recess Profile Wedge Order 1 per track</p>	•	<p>53903-25 Motor Pulley Connects motor to track</p> 
•	 <p>53908-25 Overlap Right 53909-25 Underlap Left FMS Plus Master Carrier</p>	•	<p>53910-25 Return Pulley</p> 
•	 <p>52008-25 Slim Line Klick Carrier Draperies hang to conceal track</p>	•	<p>53911-25 Upside Down Pulley</p> 
•	 <p>52009-25 Ball Bearing Carrier for motorization</p>	•	<p>53912-25 Cover Plate for Recess Motor and Return Pulley</p> 
		•	<p>53913-25 Cover Plate for Recess Motor, Upside Down Motor, and Return Pulley</p> 



Scan for more information on the FOREST DSXL Motorized System











DSXL® LED MOTORIZED DESIGN SYSTEM + LED LIGHTING

- Elegantly shaped aluminum extrusion, white, powder coated and lubricated with a patented process. LED lighting lights up the backside of drapery or the track itself. Ultra-quiet and smooth operation for contract or residential applications.
- LED strips have low energy consumption, are eco-friendly, dimmable. Lifespan is 30,000 hours.
- Maximum weight is 3 lbs/ft.
- Motorize with any Forest Shuttle. See all motor specifications on pages 93-94. All Forest Shuttle motors include a 10 year warranty.
- Control drapes with a gentle tug, wall switch remote, any home automation system or by smart phone app. See control options pages 95-96.

ASSEMBLED SYSTEM


















Includes track, masters, pinchpleat or ripplefold carriers, brackets, lighting components, motor, and power supply plus choice of EasyTouch remote, Diamond remote or Forest wall switch.

DSXL LED	COMPONENT
• 	52925-25 Shuttle HD (M) 52925-59 Shuttle HD (M) black 52939-25 Shuttle Eco (S) See motor specs on pages 93-94
• 	52928-25 Power Cord, 7' 6" 52934-25 Power Cord, 16' includes 24 volt power supply
• 	52933-25 white 59 black +10% Diamond Sense Wall Switch 2 channel
• 	52931-25D white 59D black +10% Diamond Sense Remote RF 15 channel w/ holder, range 98'

DSXL LED	COMPONENT
• 	52948-25 59 black Wi-Fi Dongle For voice and app control over wi-fi. Provides feedback (bi-directional). Use with Shuttles HD and Eco.
• <i>COMING SOON!</i> 	52960-25 white 59 black EasyTouch Remote RF 6 channel
• 	52955-25 Bond Bridge Pro For voice and app control over RF. Easily pair using the Forest remote. Controls all of your devices in one hub.
• 	52945-25 white Sidekick Gen 3 Remote Works with or without Bond Bridge Pro. 1-5 channels

DRAPERY MOTORIZATION

SHUTTLE MOTORS | CONTROLS ROADMAP | FMS | RMS | **DSXL LED** | HANOVER | DRESDEN | DEVENTER MRS | CORDOBA | LONDON

DSXL LED	COMPONENT	DSXL LED	COMPONENT
•	 <p>3219-25 DSXL LED Motorized Track white 19' x 10 tracks per bundle bundle = 190'</p>	•	 <p>9012-25 Transport Belt Kevlar reinforced</p>
•	 <p>2302-25 DSXL Swivel Ceiling Bracket</p>	•	 <p>52512-25 white Transport Belt Connector</p>
•	 <p>2301-25 DSXL Wall Bracket w/ Swivel</p>	•	 <p>3203-25 Motor Pulley, plastic Connects motor to track</p>
•	 <p>Two Piece Connected Snap Carrier w/ Square Base, in plastic sleeve. Use 1 1/4" snap tape 2114-25, 59 black 60% fullness, 2 5/8" OC 2111-25, 65 brown, 90 grey 80% fullness, 2 3/8" OC 2112-25, 59 black 100% fullness, 2 1/8" OC 2115-25, 59 black 120% fullness, 1 7/8" OC</p>	•	 <p>2402-25 Motor Pulley/Return Pulley Set, metal</p>
•	 <p>52008-25 Slim Line Klick Carrier Draperies hang to conceal track</p>	•	 <p>3000-00 LED Strip, 3000k/24v 30,000 hr lifespan, dimmable</p>
•	 <p>52009-25 Ball Bearing Carrier for motorization</p>	•	 <p>3010-00 LED Strip, middle</p>
•	 <p>9040-25 FES Butt Master</p>	•	 <p>3030-00 Mounting Device for LED Strip</p>
		•	 <p>3103-25 LED Dimmer Allows control of light strip with Diamond remote.</p>
		•	 <p>3100-00 with 6' 6" cord 3105-25 with 13" cord LED Cable Connects LED Strip 3010-00 to LED Dimmer 3102-25 24 volt</p>
		•	 <p>3106-25 LED Extension Cable for LED Cables 3100-00 and 3105-25 6' 6"</p>

DRAPERY MOTORIZATION DSXL LED

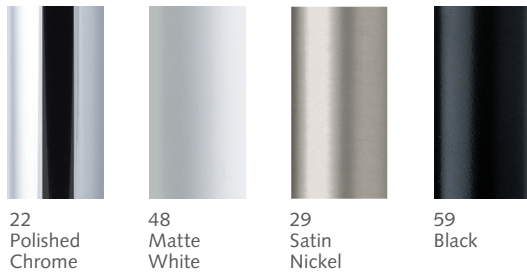


Scan for more information on the FOREST HANOVER Motorized System

HANOVER MOTORIZED SYSTEM







- A sleek stylish motorized profile best suited for light to medium weight draperies.
- Wall or ceiling mount. See bracket count below.
 - 0-5' = 2 brackets 11-15' = 4 brackets
 - 6-10' = 3 brackets 16-20' = 5 brackets
- Motorize with any Forest Shuttle. See all motor specifications on pages 93-94. All Forest Shuttle motors include a 10 year warranty.
- Control drapes with a gentle tug, wall switch, remote, any home automation system or by smart phone app. See control options pages 95-96.






HANOVER FINISHES XX = finish color



ASSEMBLED SYSTEM





















Includes rail, masters, pinchpleat or ripplefold carriers, brackets, motor, power supply, motor pulley, and return pulley plus choice of EasyTouch remote, Diamond remote or Forest wall switch.

HANOVER	COMPONENT
	52925-25 Shuttle HD (M) 52925-59 Shuttle HD (M) black 52939-25 Shuttle Eco (S) See motor specs on pages 93-94
	52928-25 Power Cord, 7' 6" 52934-25 Power Cord, 16' includes 24 volt power supply
	52926-25 Shuttle iOn Includes battery pack. Order charging cable below separately, 52924-59. See motor specs on pages 93-94
	52924-59 Battery Charger Charges battery included with Shuttle iOn motor above, 52926-25.
	52949-25 Battery Pack Additional battery pack for Shuttle iOn motor
	52933-25 white 59 black Forest Wall Switch 2 channel

HANOVER	COMPONENT
	52931-25D white 59D black Diamond Sense Remote RF 15 channel w/ holder, range 98'
	<i>COMING SOON!</i> 52960-25 white 59 black EasyTouch Remote RF 6 channel
	52948-25 59 black Wi-Fi Dongle For voice and app control over wi-fi. Provides feedback (bi-directional). Use with Shuttles HD and Eco.
	52955-25 Bond Bridge Pro For voice and app control over RF. Easily pair using the Forest remote. Controls all of your devices in one hub.
	52945-25 white Sidekick Gen 3 Remote Works with or without Bond Bridge Pro. 1-5 channels

DRAPERY MOTORIZATION

SHUTTLE MOTORS | CONTROLS ROADMAP | FMS | RMS | DSXL LED | **HANOVER** | DRESDEN | DEVENTER MRS | CORDOBA | LONDON

HANOVER	COMPONENT	HANOVER	COMPONENT
	B8223246-XX Hanover Profile 19' 7"		B11473-50-XX Ceiling Bracket P: 2"
	B8221818-59/90 Hanover Rail		B11473-80-XX Ceiling Bracket P: 2 7/8"
	B11679-L-46-XX Left Motor Pulley		B11473-15-XX Ceiling Bracket P: 5/8"
	B11679-R-46-XX Right Motor Pulley		Two Piece Connected Snap Carrier w/ Square Base, in plastic sleeve. Use 1 1/4" snap tape 2114-25, 59 black 60% fullness, 2 5/8" OC 2111-25, 65 brown, 90 grey 80% fullness, 2 3/8" OC 2112-25, 59 black 100% fullness, 2 1/8" OC 2115-25, 59 black 120% fullness, 1 7/8" OC
	B11683-L-46-XX Left End Pulley		52008-25 Slim Line Klick Carrier Draperies hang to conceal track
	B11683-R-46-XX Right End Pulley		52009-25 Ball Bearing Carrier for motorization
	9012-25 Transport Belt Kevlar reinforced		52508-25 Overlap Right 52509-25 Underlap Left 59 black +10% Belt Master Carrier
	52512-25 white 59 black +10% Transport Belt Connector		52508-25A Overlap R 52509-25A Underlap L Belt Master Carrier with snaps
	B11260-130-XX Extended Wall Bracket P: 4 3/4"		52410-25 Butt Right 52409-25 Butt Left 59 black +10% Butt Master Carrier with snaps
	B11592-00 Flush Ceiling Bracket		2552-25 6" Extension Arm for master Use w/ two one-way draw

DRAPERY MOTORIZATION HANOVER



Scan for more information on
FOREST DRESDEN MOTORIZED



DRESDEN MOTORIZED

- 1 1/8" motorized system best suited for light to medium weight draperies.
- Rail can be bent or curved. An actual size template is required. See pages 17-18 for more information. Polished chrome cannot be bent or curved.
- Wall or ceiling mount. See bracket count below.

0-5' = 2 brackets	11-15' = 4 brackets
6-10' = 3 brackets	16-20' = 5 brackets
- Motorize with any Forest Shuttle. See all motor specifications on pages 93-94. All Forest Shuttle motors include a 10 year warranty.
- Control drapes with a gentle tug, wall switch, remote, any home automation system or by smart phone app. See control options pages 95-96.


ASSEMBLED SYSTEM

Includes rail, masters, pinchpleat or ripplefold carriers, brackets, motor, power supply, motor pulley, return pulley, single wall brackets plus choice of EasyTouch remote, Diamond remote or Forest wall switch. Finials are optional and should be ordered separately.


DRESDEN FINISHES XX = finish color




DRESDEN MOTORIZED FINIALS - OPTIONAL




B124028-XX
End Cap Finial



B690-XX
Pescara Finial



B3362-XX
Alassio Finial




B650-22, 29, 59
Verona Finial



B610-XX
Napoli Finial



B660-22, 24, 29, 70
Roma Finial



B3389-100
Ardea Finial
B3389/1-XX
Socket for Ardea Finial

DRAPERY MOTORIZATION

SHUTTLE MOTORS | CONTROLS ROADMAP | FMS | RMS | DSXL LED | HANOVER | **DRESDEN** | DEVENTER MRS | CORDOBA | LONDON

DRESDEN	COMPONENT	DRESDEN	COMPONENT
•	 <p>B809-28-XX 1 1/8" Aluminum Rail 19' 7"</p>	•	 <p>B11670-V-XX Adjustable Wall Bracket</p>
•	 <p>B899-4-00 Rail Connector</p>	•	 <p>B11873-50-XX Ceiling Bracket</p>
•	 <p>B11679-L-XX B11679-R-XX Forest Shuttle Motor Pulley</p>	•	 <p>B11873-15-XX Ceiling Bracket 5/8" Projection</p>
•	 <p>B11699-L-XX B11699-R-XX Somfy Motor Pulley</p>	•	 <p>53408-22,24,29,59 Flush Ceiling Bracket Cannot use finials with this bracket</p>
•	 <p>B11669-L-XX B11669-R-XX Lutron Motor Pulley</p>	•	<p>Two Piece Connected Snap Carrier w/ Square Base, in plastic sleeve. Use 1 1/4" snap tape</p> <p>2114-25, 59 black 60% fullness, 2 5/8" OC 2111-25, 65 brown, 90 grey 80% fullness, 2 3/8" OC 2112-25, 59 black 100% fullness, 2 1/8" OC 2115-25, 59 black 120% fullness, 1 7/8" OC</p>
•	 <p>B11659-L-22,29,59 B11659-R-22,29,59 Rollease Motor Pulley</p>	•	 <p>52008-25 Slim Line Klick Carrier Draperies hand to conceal track</p>
•	 <p>B11683-L-XX B11683-R-XX Standard Return Pulley</p>	•	 <p>52009-25 Ball Bearing Carrier for motorization</p>
•	 <p>B11683-41-XX Short Return Pulley for one-way draw</p>	•	 <p>52508-25 Overlap R 52509-25 Underlap L Belt Master Carrier</p>
•	 <p>B122028-XX Inside Mount Bracket</p>	•	 <p>52508-25A Overlap R 52509-25A Underlap L Belt Master Carrier with snaps</p>
•	 <p>9012-25 Transport Belt Kevlar reinforced</p>	•	 <p>52410-25 Butt Right 52409-25 Butt Left 59 black +10% Butt Master Carrier with snaps</p>
•	 <p>52512-25 white 59 black +10% Transport Belt Connector</p>	•	 <p>2552-25 6" Extension Arm for master Use w/ two one-way draw</p>
•	 <p>B11670-120-XX Single Bracket</p>		
•	 <p>B11672-220-XX Double Bracket</p>		

DRAPERY MOTORIZATION

SHUTTLE MOTORS | CONTROLS ROADMAP | FMS | RMS | DSXL LED | HANOVER | **DRESDEN** | DEVENTER MRS | CORDOBA | LONDON


WEAR RESISTANT PULLEY HOUSING

For low wear operation the pulley housing has been equipped with high quality ball bearings.



REINFORCED BELT












The Kevlar reinforced belt runs quietly and has superior longevity.




FOREST SHUTTLE MOTORS

- Touch Impulse Technology opens or closes drapes with a gentle tug.
- Integrated emergency control insures manual operation of the drapery in case of power failure.
- Choose the Forest Shuttle Eco for lightweight fabrics.
- Choose the Forest Shuttle HD for strength at an economical price.
- Choose the Shuttle iOn when a power source is not close by.
- All Forest Shuttle motors come with a 10-year warranty.


DRAPERY MOTORIZATION DRESDEN

DRESDEN	COMPONENT	DRESDEN	COMPONENT
	52925-25 Shuttle HD (M) 52925-59 Shuttle HD (M) black 52939-25 Shuttle Eco (S) See motor specs on pages 93-94		52931-25D white 59D black Diamond Sense Remote RF, 15 channel w/ holder, range 98'
	52928-25 Power Cord, 7' 6" 52934-25 Power Cord, 16' includes 24 volt power supply		<i>COMING SOON!</i> 52960-25 white 59 black EasyTouch Remote RF 6 channel
	52926-25 Shuttle iOn Includes battery pack. Order charging cable below separately, 52924-59. See motor specs on pages 93-94		52948-25 59 black Wi-Fi Dongle For voice and app control over wi-fi. Provides feedback (bi-directional). Use with Shuttles HD and Eco.
	52924-59 Battery Charger Charges battery included with Shuttle iOn motor above, 52926-25.		52955-25 Bond Bridge Pro For voice and app control over RF. Easily pair using the Forest remote. Controls all of your devices in one hub.
	52949-25 Battery Pack Additional battery pack for Shuttle iOn motor		52945-25 white 59 black Forest Wall Switch 2 channel
	52933-25 white 59 black Forest Wall Switch 2 channel		52945-25 white Sidekick Gen 3 Remote Works with or without Bond Bridge Pro. 1-5 channels



COMPLETELY CLOSED DRAPERIES USING OVERLAP MASTERS

The overlap master carrier guarantees a complete 3" overlap of the draperies. Extended arms available.

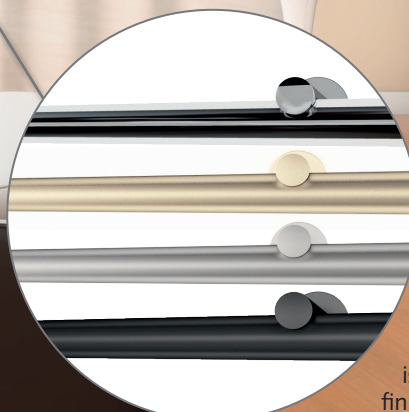
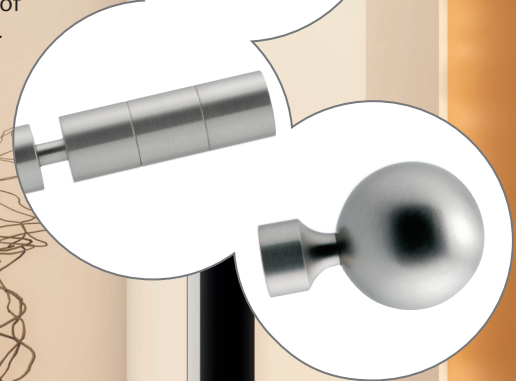


RETURN PULLEY

The return pulley is made of a special plastic and uses a bearing which allows ultra-smooth operation.





SELECT YOUR INDIVIDUAL FINIAL

Our decorative finials offer a variety of design options. See all finials on page 99. Finials are optional.



HIGH-GRADE ALUMINUM:

Dresden Motorized is available in the finishes below.

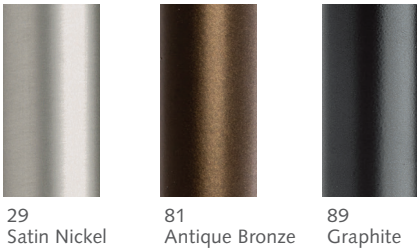
- Polished Chrome - 22 
- Brushed Gold - 26 
- Satin Nickel - 29 
- Black - 59 



Scan for more information on
FOREST DEVENTER MRS MOTORIZED



MRS COLLECTION FINISHES XX = finish color














DEVENTER MRS® MOTORIZED

- 1 1/8" motorized system best suited for light to medium weight draperies.
- Wall or ceiling mount. See bracket count below.
 - 0-5' = 2 brackets 11-15' = 4 brackets
 - 6-10' = 3 brackets 16-20' = 5 brackets
- Motorize with any Forest Shuttle. See all motor specifications on pages 93-94. All Forest Shuttle motors include a 10 year warranty.
- Control drapes with a gentle tug, wall switch, remote, any home automation system or by smart phone app. See control options pages 95-96.

ASSEMBLED SYSTEM

Includes rail, motor, power supply, motor pulley, return pulley, wall or ceiling brackets, carriers, and masters plus EasyTouch remote, Diamond remote or Forest wall switch. Double sets are available.

DEV MRS	COMPONENT
<ul style="list-style-type: none">  	<ul style="list-style-type: none"> 52925-25 Shuttle HD (M) 52925-59 Shuttle HD (M) black 52939-25 Shuttle Eco (S) See motor specs on pages 93-94
<ul style="list-style-type: none">  	<ul style="list-style-type: none"> 52928-25 Power Cord, 7' 6" 52934-25 Power Cord, 16' includes 24 volt power supply
<ul style="list-style-type: none">  	<ul style="list-style-type: none"> 52926-25 Shuttle iOn Includes battery pack. Order charging cable below separately, 52924-59. See motor specs on pages 93-94
<ul style="list-style-type: none">  	<ul style="list-style-type: none"> 52924-59 Battery Charger Charges battery included with Shuttle iOn motor above, 52926-25.
<ul style="list-style-type: none">  	<ul style="list-style-type: none"> 52949-25 Battery Pack Additional battery pack for Shuttle iOn motor
<ul style="list-style-type: none">  	<ul style="list-style-type: none"> 52933-25 white 59 black Forest Wall Switch 2 channel

DEV MRS	COMPONENT
<ul style="list-style-type: none">  	<ul style="list-style-type: none"> 52931-25D white 59D black Diamond Sense Remote RF 15 channel w/ holder, range 98'
<ul style="list-style-type: none"> <i>COMING SOON!</i>  	<ul style="list-style-type: none"> 52960-25 white 59 black EasyTouch Remote RF 6 channel
<ul style="list-style-type: none">  	<ul style="list-style-type: none"> 52948-25 59 black Wi-Fi Dongle For voice and app control over wi-fi. Provides feedback (bi-directional). Use with Shuttles HD and Eco.
<ul style="list-style-type: none">  	<ul style="list-style-type: none"> 52955-25 Bond Bridge Pro For voice and app control over RF. Easily pair using the Forest remote. Controls all of your devices in one hub.
<ul style="list-style-type: none">  	<ul style="list-style-type: none"> 52945-25 white Sidekick Gen 3 Remote Works with or without Bond Bridge Pro. 1-5 channels

DRAPERY MOTORIZATION

SHUTTLE MOTORS | CONTROLS ROADMAP | FMS | RMS | DSXL LED | HANOVER | DRESDEN | **DEVENTER MRS** | CORDOBA | LONDON

DEV MRS	COMPONENT	DEV MRS	COMPONENT
•	 <p>51919-XX 1 1/8" Aluminum Rail 19' 7"</p>	•	 <p>52430-XX End Cap Finial</p>
•	 <p>53413-90 Rail Connector aluminum, 3"</p>	•	 <p>52431-XX Ball Finial</p>
•	 <p>51901-XX Left Motor Pulley 51902-XX Right Motor Pulley</p>	•	 <p>52432-XX Notched Finial</p>
•	 <p>51903-XX Left Return Pulley 51904-XX Right Return Pulley</p>	•	 <p>53408-25, 29, 59, 81 Flush Ceiling Bracket Cannot use finials</p>
•	 <p>51905-XX Motor Pulley Universal</p>	•	<p>Two Piece Connected Snap Carrier w/ Square Base, in plastic sleeve. Use 1/4" snap tape</p> <p>2114-25, 59 black 60% fullness, 2 5/8" OC 2111-25, 65 brown, 90 grey 80% fullness, 2 3/8" OC 2112-25, 59 black 100% fullness, 2 1/8" OC 2115-25, 59 black 120% fullness, 1 7/8" OC</p>
•	 <p>51906-25, 59 Motor Pulley Universal Cap Set</p>	•	 <p>52008-25 59 black, 65 brown +10% Slim Line Klick Carrier Draperies hang to conceal track</p>
•	 <p>51907-XX Motor Pulley Universal End Cap Finial</p>	•	 <p>52009-25 Ball Bearing Carrier for motorization</p>
•	 <p>51908-XX Reutrn Pulley Universal</p>	•	 <p>52508-25 Overlap R 52509-25 Underlap L Belt Master Carrier</p>
•	 <p>9012-25 Transport Belt Kevlar reinforced</p>	•	 <p>52508-25A Overlap R 52509-25A Underlap L Belt Master Carrier with snaps</p>
•	 <p>52512-25 white 59 black +10% Transport Belt Connector</p>	•	 <p>52410-25 Butt Right 52409-25 Butt Left 59 black +10% Butt Master Carrier with snaps</p>
•	 <p>53402-XX Extended Single Bracket</p>		
•	 <p>53412-XX Inside Mount Bracket</p>		

 **BREAK PACK PRICING**  - Prices with this designation indicate a 20% up charge for broken pack quantities.



CORDOBA MOTORIZED

- Forest FMS Track with 2" Cordoba Collection wood pole fascia
- Motorize with any Forest Shuttle. See all motor specifications on pages 93-94. All Forest Shuttle motors include a 10 year warranty.
- Control drapes with a gentle tug, wall switch, remote, any home automation system or by smart phone app. See control options pages 95-96.



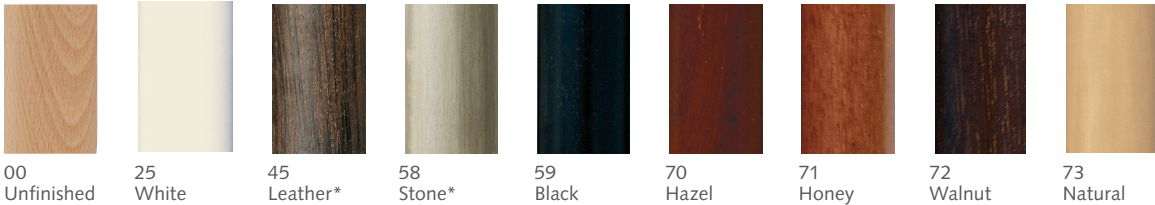
Scan for more information on
FOREST MOTORIZED CORDOBA












ASSEMBLED PRICING

Includes assembled track, wood fascia, motor, power supply, and brackets plus EasyTouch remote, Diamond remote or Forest wall switch.























CORDOBA COLLECTION FINISHES XX = finish color



CORDOBA	COMPONENT	CORDOBA	COMPONENT
	 <p>52925-25 Shuttle HD (M) 52925-59 Shuttle HD (M) black 52939-25 Shuttle Eco (S) See motor specs on pages 93-94</p>		 <p>52931-25D white 59D black Diamond Sense Remote RF 15 channel w/ holder, range 98'</p>
	 <p>52928-25 Power Cord, 7' 6" 52934-25 Power Cord, 16' includes 24 volt power supply</p>		<p><i>COMING SOON!</i></p>  <p>52960-25 white 59 black EasyTouch Remote RF 6 channel</p>
	 <p>52926-25 Shuttle iOn Includes battery pack. Order charging cable below separately, 52924-59. See motor specs on pages 93-94</p>		 <p>52948-25 59 black Wi-Fi Dongle For voice and app control over wi-fi. Provides feedback (bi-directional). Use with Shuttles HD and Eco.</p>
	 <p>52924-59 Battery Charger Charges battery included with Shuttle iOn motor above, 52926-25.</p>		 <p>52955-25 Bond Bridge Pro For voice and app control over RF. Easily pair using the Forest remote. Controls all of your devices in one hub.</p>
	 <p>52949-25 Battery Pack Additional battery pack for Shuttle iOn motor</p>		
	 <p>52933-25 white 59 black Forest Wall Switch 2 channel</p>		 <p>52945-25 white Sidekick Gen 3 Remote Works with or without Bond Bridge Pro. 1-5 channels.</p>

DRAPERY MOTORIZATION

SHUTTLE MOTORS | CONTROLS ROADMAP | FMS | RMS | DSXL LED | HANOVER | DRESDEN | DEVENTER MRS | **CORDOBA** | LONDON

CORDOBA	COMPONENT	CORDOBA	COMPONENT
•	 <p>51323-25 white 59 black FMS Track 23' x 10 tracks per bundle bundle = 230'</p>	•	 <p>52009-25 Ball Bearing Carrier for motorization</p>
•	 <p>1051RSW-XX 2" Cordoba Smooth, 14'</p>	•	 <p>52508-25 Overlap Right 52509-25 Underlap Left 59 black Belt Master Carrier</p>
•	 <p>1051RRW-XX 2" Cordoba Reeded, 14'</p>	•	 <p>52508-25A Overlap Right 52509-25A Underlap Left 59A black +10% Belt Master Carrier with snaps</p>
•	 <p>1151WEN-XX 2" Cordoba End Cap See all finials page 80</p>	•	 <p>52410-25 Butt Right 52409-25 Butt Left 59 black Butt Master Carrier with snaps</p>
•	 <p>3906-25 59 black Track Connector & key 3904-00</p>	•	 <p>2552-25 6" Extension Arm for master Use w/ two one-way draw</p>
•	 <p>3280-25 59 black 3" Single Wall Bracket heavy duty projection 2 1/2"</p>	•	 <p>52903-25 59 black Forest Shuttle Motor Pulley Connects motor to track</p>
•	 <p>3281-25 59 black 6" Double Wall Bracket heavy duty projection 1 1/2", 5 1/2"</p>	•	 <p>MTDR-EP-DR-AC Rollease Motor Pulley Connects motor to track</p>
•	 <p>32801-25 59 black Wall Bracket Cover use with 3280 & 3281</p>	•	 <p>52910-25 59 black Return Pulley</p>
•	 <p>2114-25 60% fullness 2 5/8" OC 2111-25 80% fullness 2 3/8" OC 2112-25 100% fullness 2 1/8" OC 2115-25 120% fullness 1 7/8" OC 59 black Two-Piece Connected Snap Carrier w/ Square Base, use 4 1/4" snap tape.</p>	•	 <p>9012-25 Transport Belt Kevlar reinforced</p>
•	 <p>52008-25 59 black Slim Line Klick Carrier Draperies hang to conceal track</p>	•	 <p>52512-25 white 59 black Transport Belt Connector</p>



LONDON MOTORIZED

- Forest FMS Track with 1 3/4" London Collection wood pole fascia.
- Motorize with any Forest Shuttle. See all motor specifications on pages 93-94. All Forest Shuttle motors include a 10 year warranty.
- Control drapes with a gentle tug, wall switch, remote, any home automation system or by smart phone app. See control options pages 95-96.



Scan for more information on
FOREST MOTORIZED LONDON



ASSEMBLED PRICING

Includes assembled track, wood fascia, motor, power supply, and brackets plus EasyTouch remote, Diamond remote or Forest wall switch. Finials are additional and can be found on page 88.

LONDON COLLECTION FINISHES XX = finish color





















WOOD POLE & COMPONENTS FINISHES					METAL COMPONENT FINISHES			
50 Oil Rubbed Bronze	51 Antique Gold	52 Burnished Gold	53 Dark Pewter	54 Distressed Ivory	22 Polished Chrome	23 Polished Brass	29 Satin Nickel	89 Graphite

LONDON	COMPONENT
	<p>52925-25 Shuttle HD (M) 52925-59 Shuttle HD (M) black 52939-25 Shuttle Eco (S) See motor specs on pages 93-94</p>
	<p>52928-25 Power Cord, 7' 6" 52934-25 Power Cord, 16' includes 24 volt power supply</p>
	<p>52926-25 Shuttle iOn Includes battery pack. Order charging cable below separately, 52924-59. See motor specs on pages 93-94</p>
	<p>52924-59 Battery Charger Charges battery included with Shuttle iOn motor above, 52926-25.</p>
	<p>52949-25 Battery Pack Additional battery pack for Shuttle iOn motor</p>
	<p>52933-25 white 59 black Forest Wall Switch 2 channel</p>

LONDON	COMPONENT
	<p>52931-25D white 59D black Diamond Sense Remote RF 15 channel w/ holder, range 98'</p>
	<p><i>COMING SOON!</i> 52960-25 white 59 black EasyTouch Remote RF 6 channel</p>
	<p>52948-25 59 black Wi-Fi Dongle For voice and app control over wi-fi. Provides feedback (bi-directional). Use with Shuttles HD and Eco.</p>
	<p>52955-25 Bond Bridge Pro For voice and app control over RF. Easily pair using the Forest remote. Controls all of your devices in one hub.</p>
	<p>52945-25 white Sidekick Gen 3 Remote Works with or without Bond Bridge Pro. 1-5 channels</p>

DRAPERY MOTORIZATION

SHUTTLE MOTORS | CONTROLS ROADMAP | FMS | RMS | DSXL LED | HANOVER | DRESDEN | DEVENTER MRS | CORDOBA | **LONDON**

LONDON	COMPONENT	LONDON	COMPONENT
•	 <p>51323-25 white 59 black FMS Track 23' x 10 tracks per bundle bundle = 230'</p>	•	 <p>52009-25 Ball Bearing Carrier for motorization</p>
•	 <p>1045RSW-5X 1 3/4" Routed Wood Pole, 10'</p>	•	 <p>52508-25 Overlap Right 52509-25 Underlap Left 59 black Belt Master Carrier</p>
•	 <p>1145MOD-5X 1 3/4" London Modern End Cap H: 2" P: 1"</p>	•	 <p>52508-25A Overlap Right 52509-25A Underlap Left 59A black Belt Master Carrier with snaps</p>
•	 <p>3045END-XX 1 3/4" Glasgow End Cap Finial H: 2" P: 1 1/8"</p>	•	 <p>52410-25 Butt Right 52409-25 Butt Left 59 black Butt Master Carrier with snaps</p>
•	 <p>3906-25 59 black Track Connector & key 3904-00</p>	•	 <p>2552-25 6" Extension Arm for master Use w/ two one-way draw</p>
•	 <p>3280-25 59 black 3" Single Wall Bracket heavy duty projection 2 1/2"</p>	•	 <p>52903-25 59 black Forest Shuttle Motor Pulley Connects motor to track</p>
•	 <p>3281-25 59 black 6" Double Wall Bracket heavy duty projection 1 1/2", 5 1/2"</p>	•	 <p>MTDR-EP-DR-AC Rollease Motor Pulley Connects motor to track</p>
•	 <p>32801-25 59 black Wall Bracket Cover use with 3280 & 3281</p>	•	 <p>52910-25 59 black Return Pulley</p>
•	 <p>2114-25 60% fullness 2 5/8" OC 2111-25 80% fullness 2 3/8" OC 2112-25 100% fullness 2 1/8" OC 2115-25 120% fullness 1 7/8" OC 59 black Two-Piece Connected Snap Carrier w/ Square Base, use 4 1/4" snap tape.</p>	•	 <p>9012-25 Transport Belt Kevlar reinforced</p>
•	 <p>52008-25 59 black Slim Line Klick Carrier Draperies hang to conceal track</p>	•	 <p>52512-25 white 59 black Transport Belt Connector</p>